

STU-HL63101MG/102MG

638nm / 7mW AlGaInP Laser Diode

Features

- Optical output power: 5mW(CW)
- Visible light output: 637nm Typ.
- Low operating current: 20mA Typ.
- Low operating voltage: 2.4V Max.
- Operating temperature: 60°C
- TE mode oscillation
- Single transverse mode



Applications

- Laser leveler
- Laser pointer
- Distance meter
- Light source of optical equipment







Absolute Maximum Ratings ($T_c=25^\circ\text{C}$)

Item	Symbol	Ratings	Unit
Optical output power	P_o	7	mW
LD Reverse Voltage	$V_{R(LD)}$	2	V
PD Reverse Voltage	$V_{R(PD)}$	30	V
Operating Temperature	T_{opr}	-10 ~ +60	°C
Storage Temperature	T_{stg}	-40 ~ +85	°C


Optical and Electrical Characteristics ($T_c=25^\circ\text{C}$)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Threshold current	I_{th}	-	15	20	mA	-
Operating current	I_{op}	-	20	25	mA	$P_o=5\text{mW}$
Operating voltage	V_{op}	-	2.2	2.4	V	$P_o=5\text{mW}$
Lasing Wavelength	λ_p	630	637	640	nm	$P_o=5\text{mW}$
Beam divergence Parallel to the junction	$\theta_{//}$	5	8	11	°	$P_o=5\text{mW}$ FWHM
Beam divergence Perpendicular to the junction	θ_{\perp}	28	34	40	°	$P_o=5\text{mW}$ FWHM
Monitor current	I_s	0.1	0.2	0.5	mA	$P_o=5\text{mW}$, $V_{R(PD)}=5\text{V}$

Typical Characteristic Curves

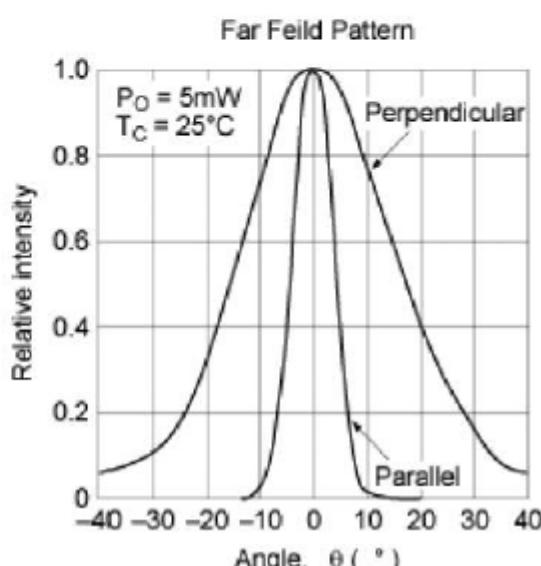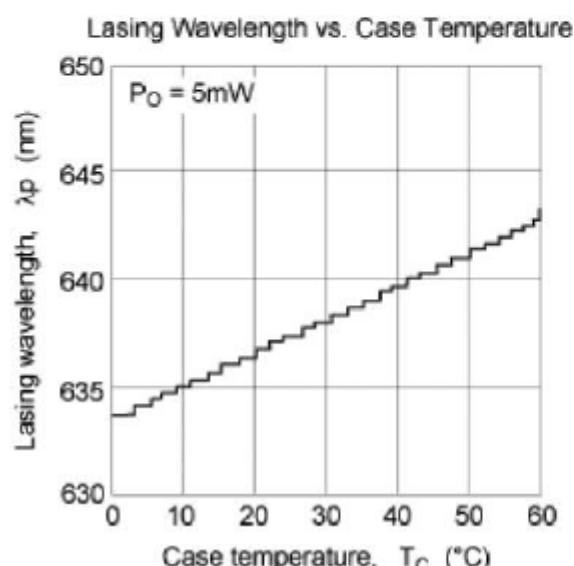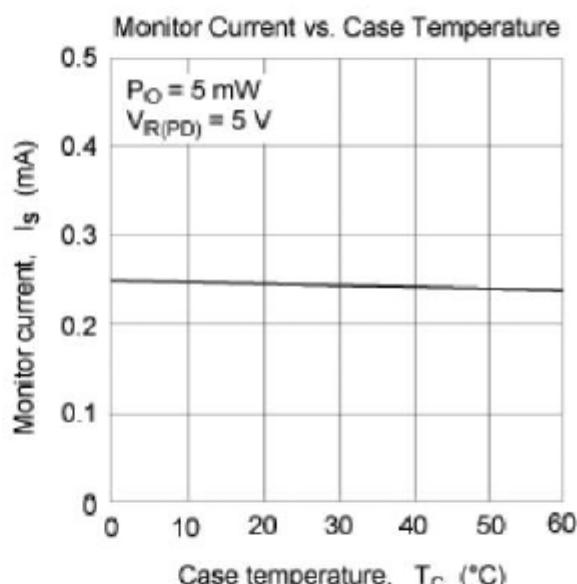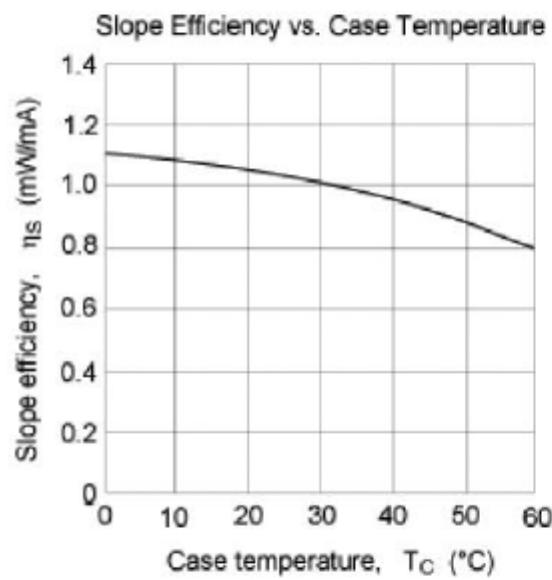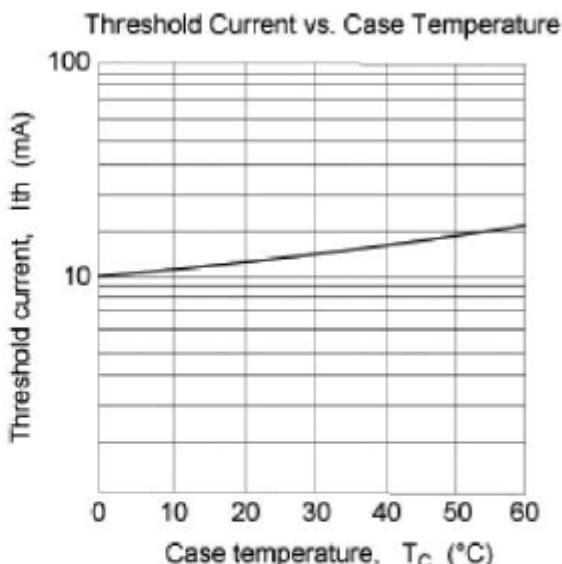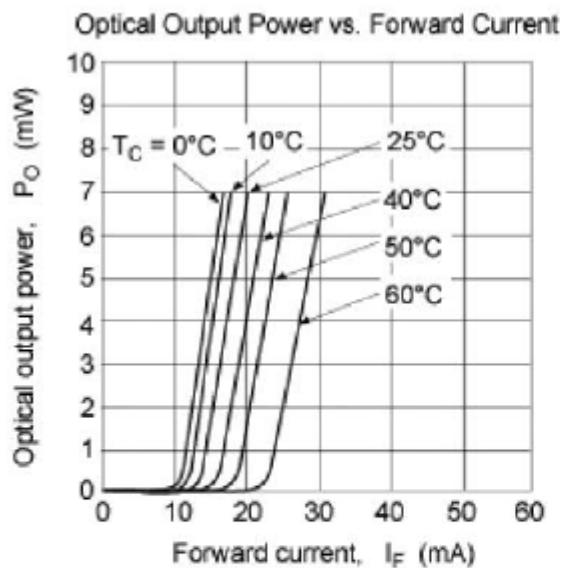

Outline

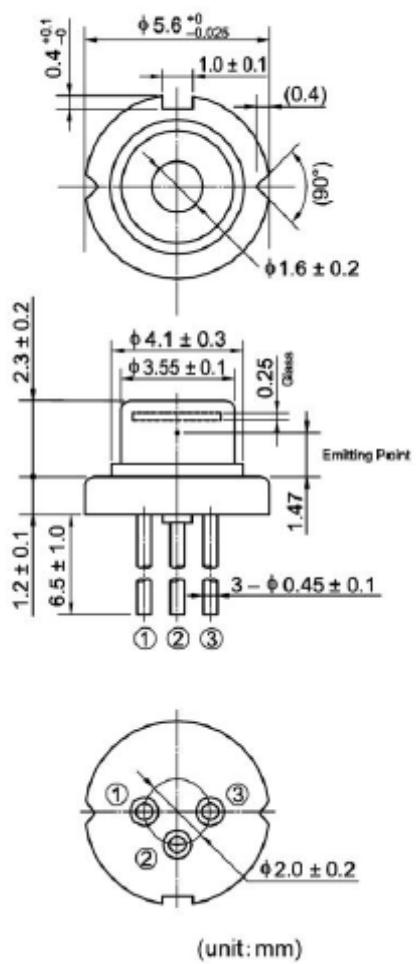

Internal Circuit

