

## FIBER-Q® 1550 nm Fiber Coupled Acousto-Optic Modulator STG-T-M200-0.1C2J-3-F2S



The Fiber-Q® acousto-optic modulator is designed for use in pulsed fiber laser amplifier systems and as a pulse picker for short pulse, high rep rate fiber lasers.

We specialize in providing optical components for high power fiber laser and amplifier systems. Inhouse control of critical manufacturing processes; from crystalline material selection and orientation, cutting, polishing and anti-reflection coating through to fiber coupling, ensure our components are of the highest optical quality.

In addition to the standard product shown, custom configurations are available for specialized applications.

## **Key Features**


- Low insertion loss
- · Compact low profile package
- Rugged hermetic design
- Stable performance
- Low power consumption
- · Custom configurations available

## Applications

- Fiber laser
- Pulse picker
- Optical sensing

## Sintec Optronics

Parameter	Min	Max	Typical	Comments
Interaction material	-	-	-	Tellurium Dioxide
Wavelength	1530 nm	1565 nm	1550 nm	Other wavelengths available on request
Average optical power handling	-	1 W	-	
Peak optical power handling	-	1 kW	-	Dependant on pulse width
Insertion loss		6.0 dB	5.0B	
Polarization dependant loss		0.5B	0.2B	
Extinction ratio	50B	8 <b>-</b> 0	-	
Return loss (RF ON/RF OFF)	40B	-	-	
Rise-time/fall-time (10% - 90%)	-	10 ns	-	Does not include RF Driver rise / fall time
Frequency	_	221	200 MHz	
VSWR		1.5:1	-	
Input impedance		61 - 1 <u>- 1</u> -	50 Ω	
RF power	-	2.5 W	-	Absolute maximum rating (Higher power will cause damage)
Frequency shift	-	-	200 MHz	Up-shift
Fiber type	1 <u>1</u> 1	-	2	SMF-28
Fiber length	<b>1</b> .5 m		2	900 µm PVDF sleeving
Fiber termination	-21	31221	2	Bare fiber

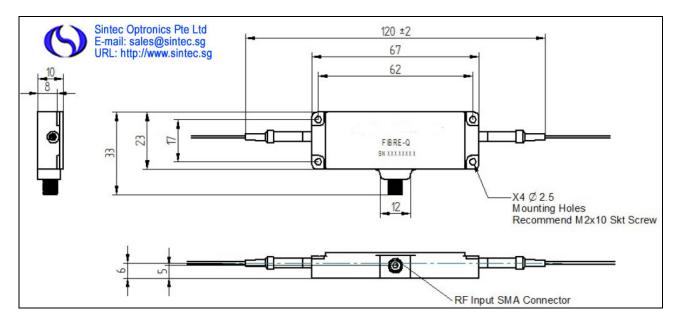

Other products which may be of interest:

- · HI REL couplers
- High power multimode combiners
- · Combiners with all types of signal feedthrough fiber
- Ultra-low ratio tap couplers
- · WDMs for combining signals with red pointer lasers
- · OCT wideband couplers