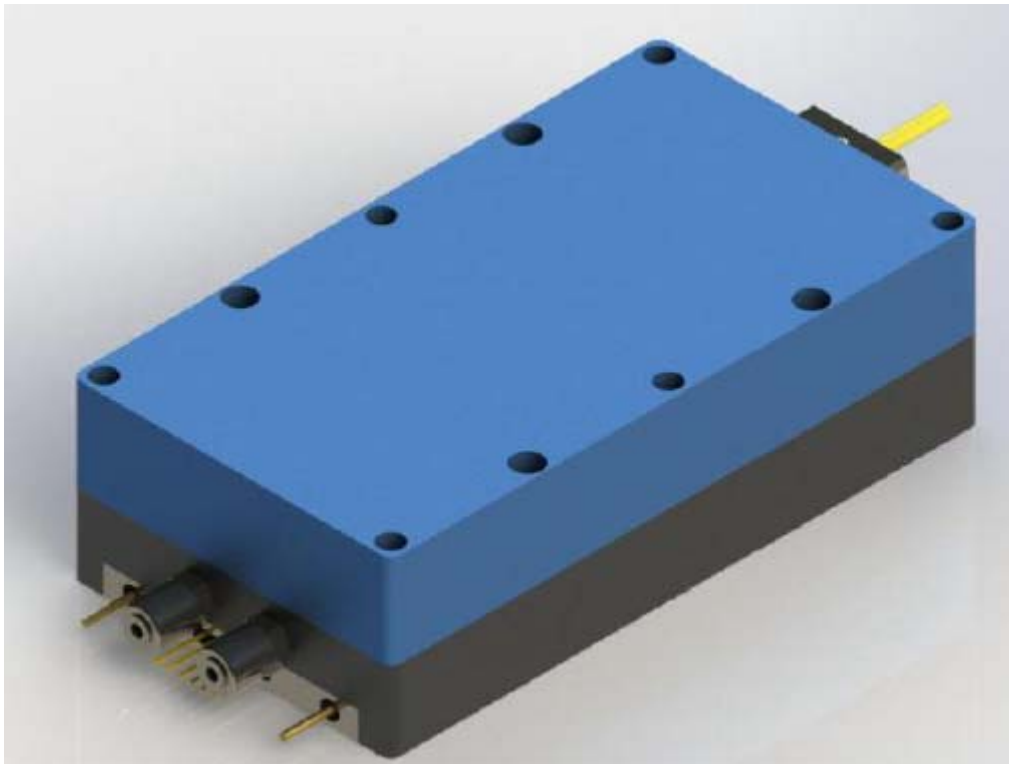


## 445nm 50W Fiber Coupled Diode Laser STK445FTRFN-50.00W



### Features:

- 445nm wavelength
- 50W output power
- 200 $\mu$ m fiber core diameter
- 0.22NA

### Applications:

- Material Processing
- Scientific research
- 3D Printing

Our High Power Diode Laser Modules are manufactured by adopting specialized fiber-coupling techniques, resulting in volume products with a high efficiency, stability and superior beam quality. The products are achieved by transforming the asymmetric radiation from the laser diode chip into an output fiber with small core diameter by using special micro optics. Inspecting and burn-in procedures in every aspect come to a result to guarantee each product with the reliability, stability and long lifetime.

Our research staffs are constantly improving and innovating the processing technology in the producing process, based on the professional knowledge and experience accumulated in long-terms. We are also continuously developing new products to meet customers' specific needs.

To provide high quality products with reasonable price is our always goal.

Specifications(25°C)		Symbol	Unit	STK445FTRFN-50.0W		
				Minimum	Typical	Maximum
<b>Optical Data<sup>(4)</sup></b>	CW-Output Power	$P_{bol}^{(4)}$	W	50.0	-	-
	Central Wavelength	$\lambda_c$	nm	435	445	455
	Spectral Width (FWHM)	$\Delta\lambda$	nm	-	6	-
	Wavelength Shift with Temperature	$\Delta\lambda/\Delta T$	nm/°C	-	0.1	-
	Wavelength Shift with Current	$\Delta\lambda/\Delta A$	nm/A	-	1	-
<b>Electrical Data</b>	Electrical-to-Optical Efficiency	PE	%	-	20	-
	Operating Current	$I_{bol}^{(4)}$	A	-	2.8	3.0
	Threshold Current	$I_{th}$	A	-	0.3	0.45
	Operating Voltage	$V_{op}$	V	-	81	90
	Slope Efficiency	$\eta$	W/A	-	20	-
<b>Fiber Data</b>	Core Diameter	$D_{core}$	$\mu m$	-	200	-
	Numerical Aperture	NA	-	-	0.22	-
	Fiber Length	L	m	-	3.5	-
	Loosen tube	-	-	3mm stainless steel		
	Minimum Bending Radius	-	mm	88	-	-
	Fiber Termination	-	-	-	SMA905	-
<b>Thermistor</b>	-	$R_t$	(K $\Omega$ )/ $\beta$ (25°C)	-	10 $\pm$ 3%/3450	-
<b>Others</b>	End of Life Current	$I_{eol}^{(5)}$	A	-	-	3.0
	End of Life Power	$P_{eol}^{(5)}$	W	40	-	-
	ESD	$V_{esd}$	V	-	-	500
	Storage Temperature <sup>(2)</sup>	$T_{st}$	°C	-20	-	70
	Lead Soldering Temp	$T_{ls}$	°C	-	-	260
	Lead Soldering Time	t	sec	-	-	10
	Operating Case Temperature <sup>(3)</sup>	$T_{op}$	°C	15	-	35
	Relative Humidity	RH	%	15	-	75


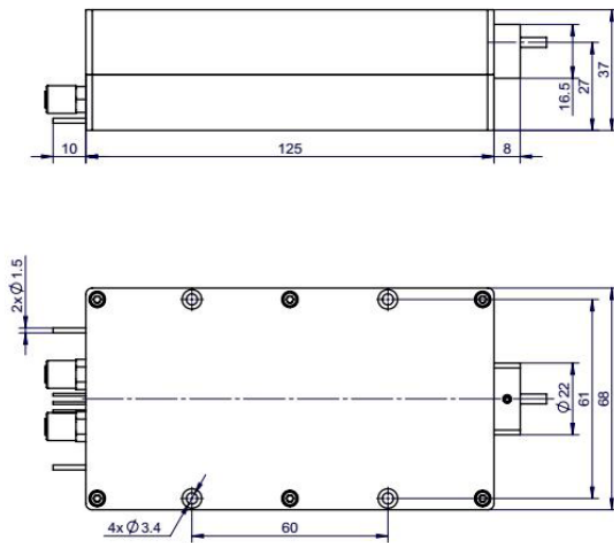
(1) Data measured under operation output at 50W@20°C.

(2) A non-condensing environment is required for operation and storage.

(3) Operating temperature defined by the package housing. Acceptable operating range is 15°C~35°C, but performance may vary.

(4) Product delivery qualification standards:  $I_{beginning\ of\ life} \leq 3A$ ,  $P_{beginning\ of\ life} \geq 50W$ ;

(5) Within the warranty period, the product is considered qualified with  $I_{end\ of\ life} = 3A$ ,  $P_{end\ of\ life} \geq 40W$ .

**Package Dimensions (mm)**


引脚	功能
1	LD ( + )
2	Thermistor*
3	Thermistor*
4	-
5	-
6	-
7	-
8	LD ( - )

\*Thermistor, PD and green aiming beam are optional functions.

**OPERATING NOTES**

- Avoid eye and skin exposure to direct radiation during operation.
- ESD precautions must be taken during storage, transportation and operation.
- Short-circuit is required between pins during storage and transportation.
- Please connect pins to wires by solder instead of using socket when operation current is higher than 6A. Soldering point should be close to the root of the pins. Soldering temperature should be lower than 260°C and time shorter than 10 second.
- Make sure the fiber output end is properly cleaned before operation of laser. Follow safety protocols to avoid injury when handling and cutting the fiber.
- Use constant current power supply to avoid surge current during operation.
- Laser diode must be used according to the specifications.
- Laser diode must work with good cooling.
- Operation temperature ranges from 15°C to 35°C.
- Storage temperature ranges from -20°C to +70°C.